

Ceramic Balun RF Transformer

50Ω 3300 to 4000 MHz

NCS1-422+



CASE STYLE: GE0805C-1
PRICE: \$ 0.99 ea. QTY (20)
PRICE: \$ 0.94 ea. QTY (100)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500, 1000, 2000

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Input RF Power***	3W

*** Derate linearly to 2W at 85°C
Permanent damage may occur if any of these limits are exceeded.

Pad Connections

PRIMARY DOT (Unbalanced Port)	1
PRIMARY (GND)	2
SECONDARY DOT (Balanced)	4
SECONDARY (Balanced)	3
NO CONNECTION	6
NOT USED (GND Externally)	5

Pads 2,3,4 are DC-connected internally

Features

- wideband, 3300 to 4000 MHz
- low phase unbalance, 4 deg. and amplitude unbalance, 0.4 dB typ.
- miniature size, 0.079"x0.049"x0.033"
- LTCC construction
- low cost
- aqueous washable

Applications

- WIMAX
- satellite
- radar


Electrical Specifications (T_{AMB} = 25°C)

Ω RATIO	FREQUENCY (MHz)	INSERTION* LOSS (dB)	PHASE UNBALANCE AT SECONDARY† (Deg.) Typ.	AMPLITUDE UNBALANCE (dB) Typ.
1	3300-4000	1.0	4	0.4

* Insertion Loss is referenced to mid-band loss, 0.8 dB. Reference Demo Board TB-419+

† Relative to 180°


Outline Drawing

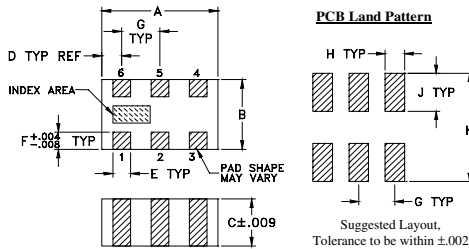

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.079	.049	.033	.014	.012	.012
2.01	1.24	0.84	0.36	0.30	0.30
G	H	J	K	wt	
.026	.014	.039	.110	grams	
0.66	0.36	1.00	2.80	.008	

Demo Board MCL P/N: TB-419+ Suggested PCB Layout (PL-264)

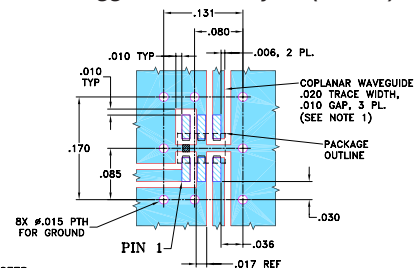




NOTES:

1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" ±.001", COPPER: 1/2 OZ, EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK


Typical Performance Data at 25°C**

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
3300.00	0.47	10.35	0.28	3.01
3400.00	0.34	11.50	0.13	2.68
3500.00	0.22	12.83	0.01	2.31
3600.00	0.13	14.29	0.14	1.81
3700.00	0.06	15.99	0.27	1.18
3740.00	0.06	16.64	0.30	0.89
3780.00	0.04	17.52	0.33	0.57
3800.00	0.03	17.98	0.36	0.49
3900.00	0.02	20.37	0.44	0.38
4000.00	0.01	23.80	0.47	1.25

** Measured with Agilent E5071B network analyzer using impedance conversion and port extension.

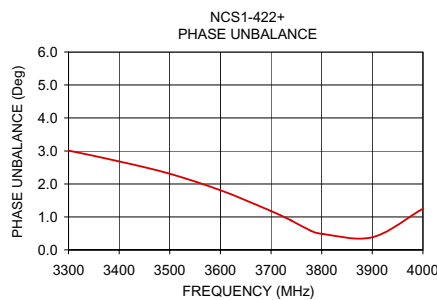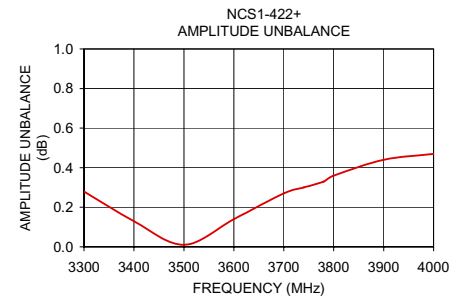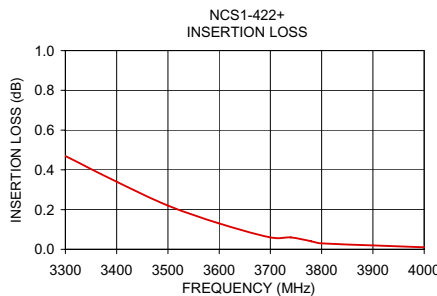

configuration J

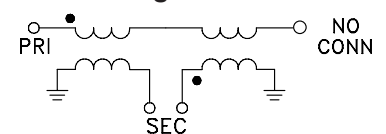

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp.

REV. A
M111644
NCS1-422+
ED 12817/34B26
RS/AM
111214