




Low Pass LC Filter Modules

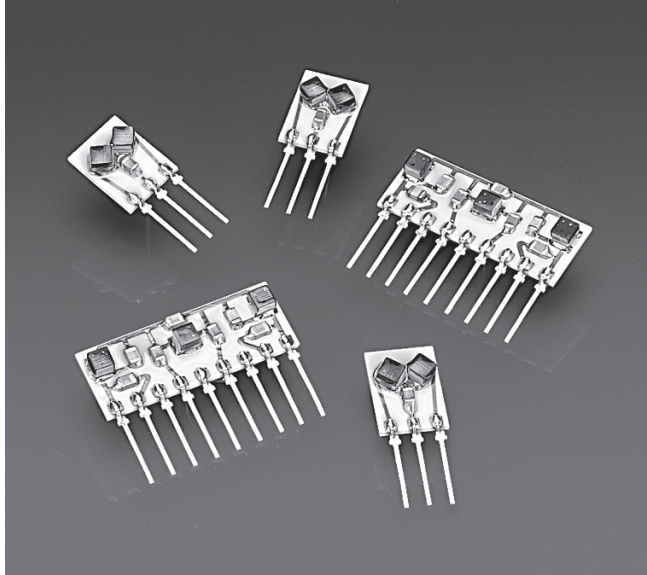

Coilcraft's family of low pass LC filters are available in 3rd order Butterworth and 7th order elliptical alignments. These space saving SIP filters offer all the benefits of an LC design: low insertion loss, high power handling and controlled group delay.

Built using Coilcraft's tight tolerance surface mount inductors, these filters can be readily customized to meet your specific requirements.

- 3rd and 7th order alignments
- 50 Ohm characteristic impedance
- Less than 0.3 dB insertion loss

Coilcraft **Designer's Kit D301** contains samples of the filters shown in bold. To order, contact Coilcraft or visit <http://order.coilcraft.com>.

S-Parameter files
ON OUR WFR SITE

7 Pole Filters

Part number	-3 dB cutoff ¹ (MHz)	I _{rms} ² (mA)
P7LP-304L	0.30	100
P7LP-604L	0.60	200
P7LP-155L	1.5	200
P7LP-305L	3.0	250
P7LP-605L	6.0	250
P7LP-156L	15	300
P7LP-306L	30	400
P7LP-606L	60	500
P7LP-157L	150	600
P7LP-307L	300	600
P7LP-507L	500	600



3 Pole Filters

Part number	-3 dB cutoff ¹ (MHz)	I _{rms} ² (mA)
P3LP-304L	0.30	100
P3LP-604L	0.60	200
P3LP-155L	1.5	200
P3LP-305L	3.0	200
P3LP-605L	6.0	300
P3LP-156L	15	400
P3LP-306L	30	500
P3LP-606L	60	500
P3LP-157L	150	900
P3LP-307L	300	900
P3LP-507L	500	500

1. Tested on Network Analyzers Agilent/HP 8753D Agilent/HP 3577B.
2. Current that causes a 15°C temperature rise from 25°C ambient.
3. **Ambient temperature range:** -40°C to +85°C
4. **Storage temperature range:** Component: -40°C to +85°C
Tray packaging: -40°C to +80°C
5. Electrical specifications at 25°C.
6. Parts in bold type are included in a Coilcraft Designer's Kit.



Weight: P3LP: 0.33 – 0.68g; P7LP: 0.86 g
Terminations: Matte-tin over nickel over phos bronze
Packaging: 30 per tray

7 Pole Filters

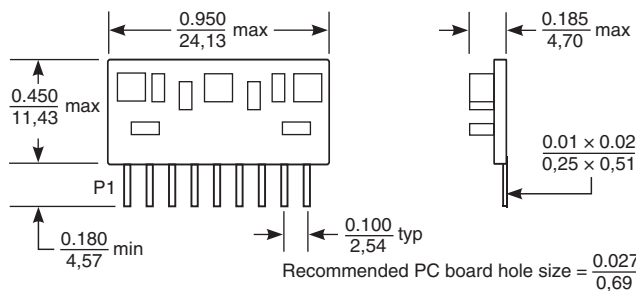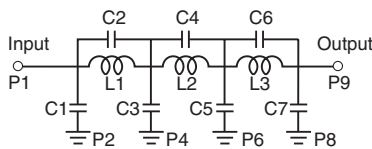

Pins P3, P5 and P7 are not connected to circuitry. They are provided for mounting purposes only.

3 Pole Filters

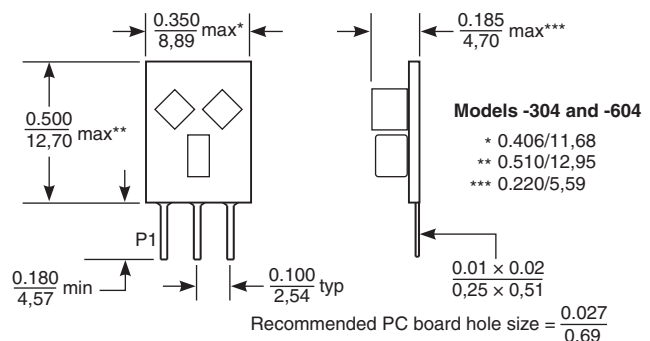





US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 118-1 Revised 01/24/12





© Coilcraft Inc. 2012
This product may not be used in medical of high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check out web site for latest information.



7 Pole Filters*

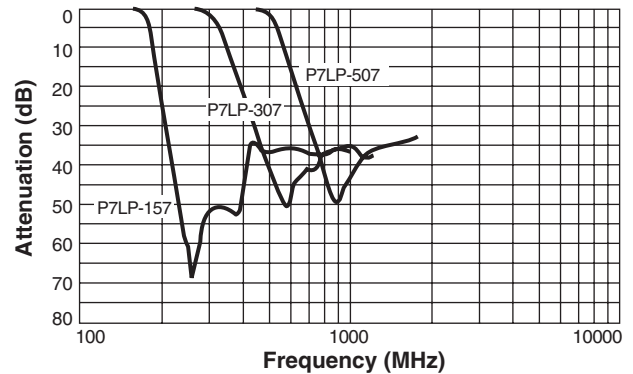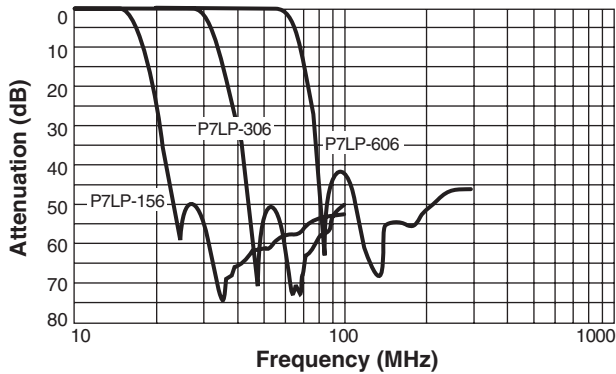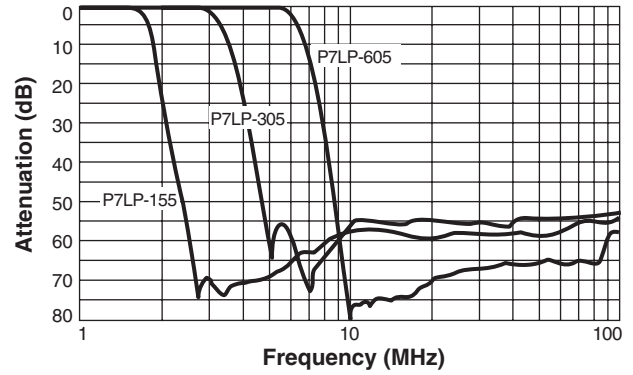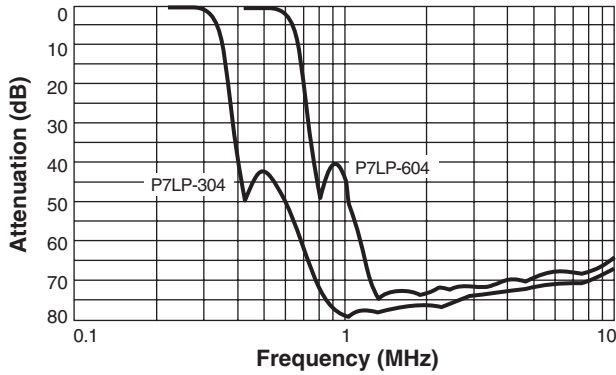

3 Pole Filters*

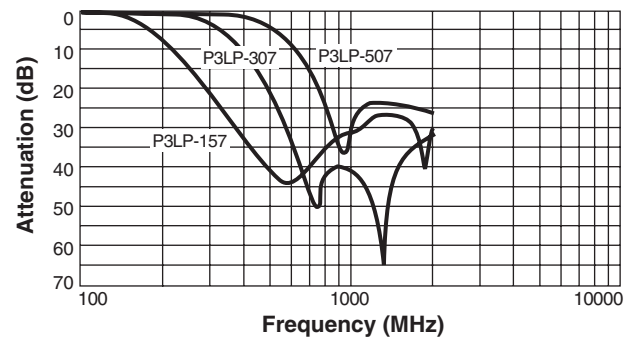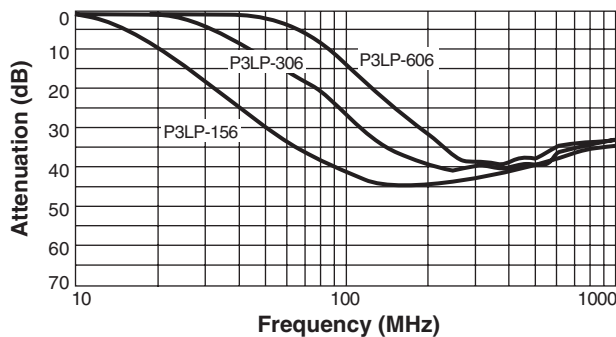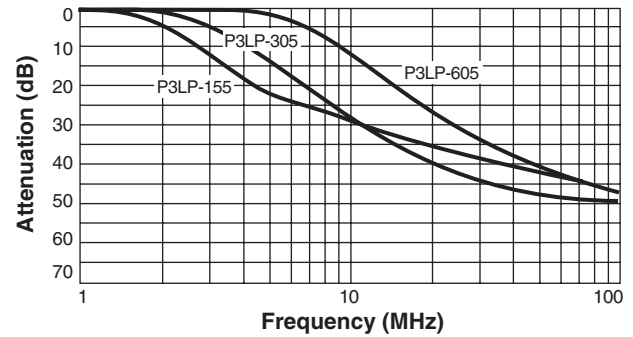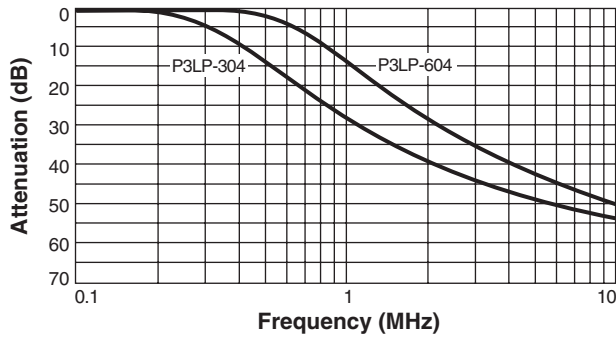

*Measured on Agilent/HP 8753D network analyzer (re: 50Ω)



US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 118-2 Revised 01/24/12

© Coilcraft Inc. 2012

This product may not be used in medical of high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check out web site for latest information.