

Directional Couplers

50Ω, 13dB coupling, 5 to 1000 MHz

DBTC-13-4+

DBTC-13-4L+



No Leads

CASE STYLE:AT790-1
PRICE:\$1.99 ea. QTY (25)
\$1.69 ea. QTY (1000)



Leads

CASE STYLE:AT1030
PRICE:\$2.14 ea. QTY (25)
\$1.84 ea. QTY (1000)

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

INPUT	3
OUTPUT	4
COUPLED	1
GROUND	2
ISOLATE (DO NOT USE)	6

Features

- very flat coupling
- very broadband, multi octave
- temperature stable, LTCC base
- all welded construction
- leads attached for better solderability
- micro miniature coupler
- aqueous washable
- protected by US Patents 6,140,887 & 6,784,521

Applications

- VHF/UHF receivers/transmitters
- cellular


Electrical Specifications

FREQ. RANGE (MHz)	COUPLING (dB)		MAINLINE LOSS* (dB)			DIRECTIVITY (dB)			VSWR** (:1)	POWER INPUT (W)							
	Nom.	Flatness	L	M	U	L	M	U		L	MU						
$f_L - f_U$		Max.	Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Max.				
5-1000	13.0±0.5	±0.6	0.7	1.3	0.7	1.3	1.1	1.6	21	17	18	13	13	—	1.2	0.5	1.0

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]
* Includes theoretical coupled power loss of 0.22 dB at 13 dB coupling
** For coupled port VSWR above 500 MHz, 1.4:1 typ.


Outline Drawing / Dimensions (inch/mm)

AT790-1 (DBTC-13-4)

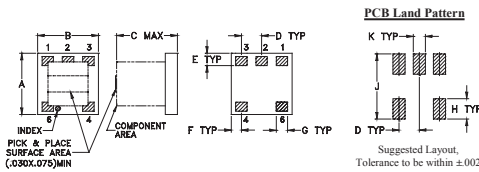

A	B	C	D	E	F	G	H	J	K	wt
.150	.150	.150	.050	.030	.025	.028	.050	.160	.030	grams
3.81	3.81	3.81	1.27	0.76	0.64	0.71	1.27	4.06	0.76	0.10

AT1030 (DBTC-13-4L)

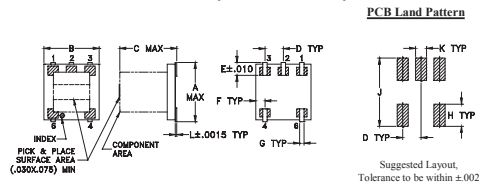


A	B	C	D	E	F	G	H	J	K	L	wt
.166	.150	.155	.050	.037	.025	.012	.060	.184	.030	.004	grams
4.22	3.81	3.94	1.27	0.94	0.64	0.30	1.52	4.67	0.76	0.10	0.10


Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
5.00	0.77	13.08	22.34	19.78	23.72	22.27
10.00	0.70	13.00	21.94	21.65	27.70	23.92
50.00	0.65	12.95	21.49	23.18	32.43	25.26
100.00	0.67	12.98	21.06	23.12	31.88	25.46
300.00	0.74	13.04	19.82	22.41	26.20	24.99
500.00	0.79	13.05	18.10	21.80	23.68	24.06
600.00	0.82	13.03	16.98	21.37	22.90	23.20
800.00	0.89	13.01	15.16	21.11	22.22	21.19
900.00	0.93	12.99	14.48	21.34	22.35	20.16
1000.00	0.98	12.97	13.82	21.62	22.42	19.03


DBTC-13-4+ MAINLINE LOSS

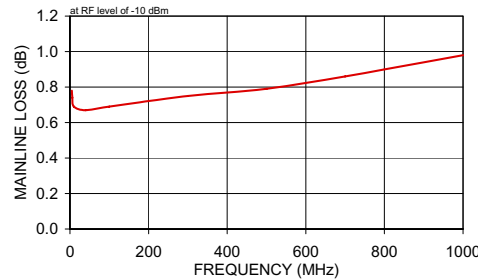


DBTC-13-4+ COUPLING & DIRECTIVITY

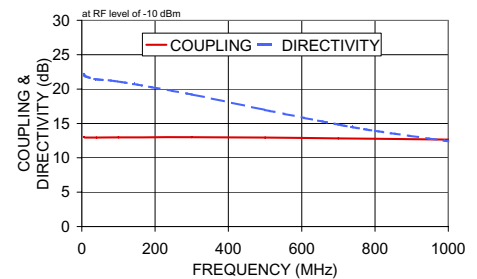

DBTC-13-4+ RETURN LOSS

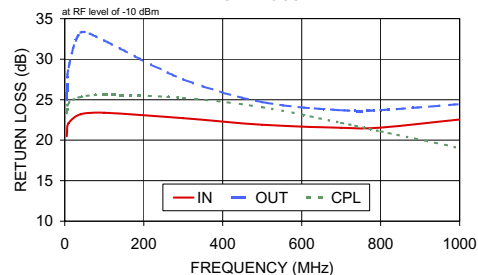


Electrical Schematic

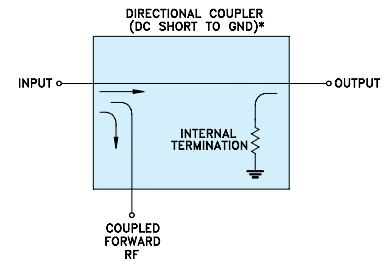

* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) THAT ROUTES DC FROM RF PORTS TO GROUND.

Demo Board MCL P/N: TB-278 Suggested PCB Layout (PL-150)

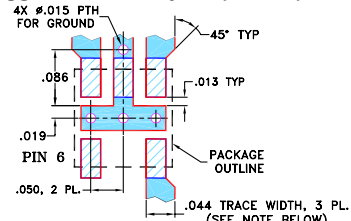

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS



REV. J
M119986
DBTC-13-4+
DBTC-13-4L+
WZ/TDC/PIAM
081113
ED-8658/1
ED-8658A