

# Directional Couplers

DBTC-20-4+

DBTC-20-4L+

50Ω, 20dB coupling, 20 to 1000 MHz

## Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C


Permanent damage may occur if any of these limits are exceeded.

## Pin Connections

INPUT	3
OUTPUT	4
COUPLED	1
GROUND	2
ISOLATE (DO NOT USE)	6


## Outline Drawing / Dimensions (inch/mm)

AT790-1 (DBTC-20-4+)

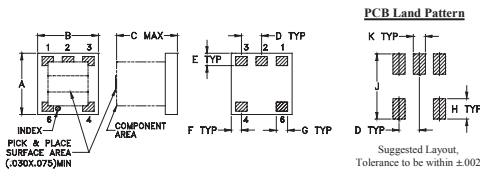

A	B	C	D	E	F	G	H	J	K	wt
.150	.150	.150	.050	.030	.025	.028	.050	.160	.030	grams
3.81	3.81	3.81	1.27	0.76	0.64	0.71	1.27	4.06	0.76	0.10


## AT1030 (DBTC-20-4L+)

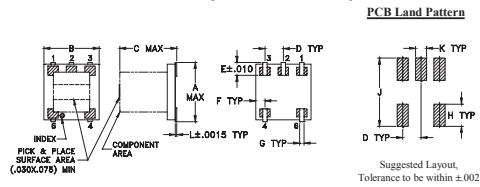

A	B	C	D	E	F	G	H	J	K	L	wt
.166	.150	.155	.050	.037	.025	.012	.060	.184	.030	.004	grams
4.22	3.81	3.94	1.27	0.94	0.64	0.30	1.52	4.67	0.76	0.10	0.10

## Demo Board MCL P/N: TB-278

Suggested PCB Layout (PL-150)

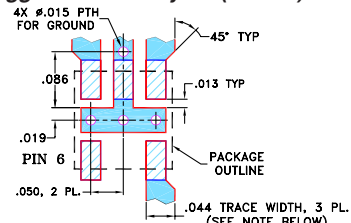

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Features

- very flat coupling
- very broadband, multi octave
- temperature stable, LTCC base
- all welded construction
- leads attached for better solderability
- micro miniature coupler
- aqueous washable
- protected by US Patents 6,140,887 & 6,784,521

## Applications

- VHF/UHF receivers/transmitters
- cellular



## Electrical Specifications

FREQ. RANGE (MHz)	COUPLING (dB)		MAINLINE LOSS* (dB)						DIRECTIVITY (dB)			VSWR** (:1)	POWER INPUT (W)				
	Nom.	Flatness	L	M	U	L	M	U	Typ.	Min.	Typ.		Min.	Typ.	Max.	Max.	
20-1000	20.4±0.5	±0.8	0.3	1.0	0.4	1.0	0.7	1.3	21	13	21	14	16	—	1.2	1.0	1.0


L = low range [f<sub>l</sub> to 10 f<sub>l</sub>] M = mid range [10 f<sub>l</sub> to f<sub>u</sub>/2] U = upper range [f<sub>u</sub>/2 to f<sub>u</sub>]  
\* Includes theoretical coupled power loss of 0.04 dB at 20 dB coupling  
\*\* For coupled port VSWR above 500 MHz, 1.6:1 typ.

## Typical Performance Data

Frequency (MHz)	Mainline Loss (dB)		Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
	In-Out	In-Cpl			In	Out	Cpl
20.00	0.33	20.30	19.79	28.00	30.48	26.85	
100.00	0.35	20.25	22.11	29.28	31.80	27.18	
200.00	0.38	20.28	23.36	29.12	30.13	24.16	
300.00	0.41	20.32	24.66	27.95	28.09	21.44	
400.00	0.43	20.36	25.00	27.01	26.54	19.23	
500.00	0.48	20.40	23.74	26.41	25.97	17.30	
600.00	0.53	20.43	21.33	25.99	25.74	15.69	
700.00	0.58	20.50	19.06	25.78	26.00	14.31	
800.00	0.63	20.59	17.10	26.16	26.88	13.07	
1000.00	0.70	20.94	14.20	28.41	29.64	11.03	

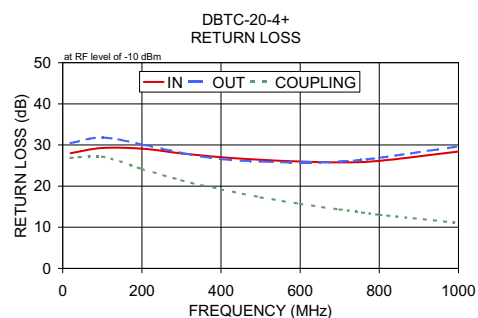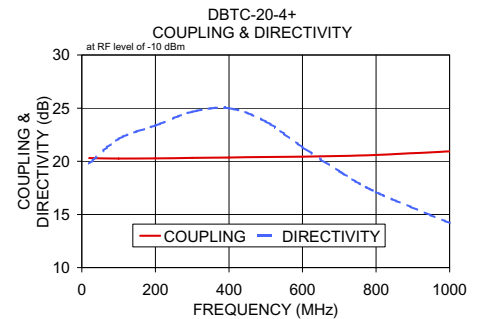

## Electrical Schematic

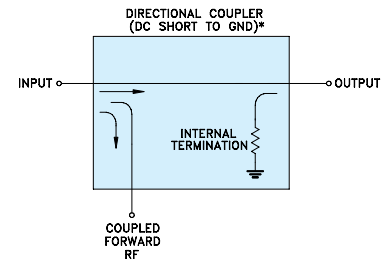

\* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) THAT ROUTES DC FROM RF PORTS TO GROUND.

**Mini-Circuits®**  
ISO 9001 ISO 14001 AS 9100 CERTIFIED

[minicircuits.com](http://minicircuits.com)

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

IF/RF MICROWAVE COMPONENTS

REV. J  
M119086  
DBTC-20-4+  
ED-8957/1  
WZTD/CP/AM  
081113