

Low Pass Filter

50Ω DC to 176 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W Max

Pin Connections

RF IN	2
RF OUT	6
GROUND	1, 3, 4, 5, 7, 8


Outline Drawing

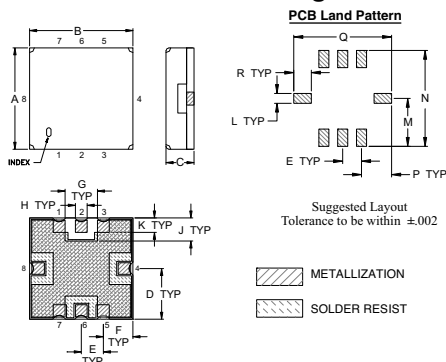

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.350	.350	.100	.175	.075	.100	.110	.040	.080
8.89	8.89	2.54	4.45	1.93	2.54	2.79	1.02	2.03
K	L	M	N	P	Q	R	wt.	
.050	.040	.195	.390	.120	.390	.070	grams	
1.27	1.02	4.95	9.91	3.05	9.91	1.78	0.25	

Demo Board MCL P/N: TB-332 Suggested PCB Layout (PL-176)



NOTES: 1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025" ± .002"; COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- High rejection
- Sharp Insertion Loss roll off
- Excellent VSWR, 1.1:1 typ. @ Passband
- Aqueous washable

Applications

- Wireless communications
- Receivers / Transmitters



CASE STYLE: GP731
PRICE: \$7.95 ea. QTY (10-49)


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


Low Pass Filter Electrical Specifications (T_{AMB} = 25°C)

PASSBAND (MHz)	f _{co} , MHz Nom.	STOPBAND (MHz)	VSWR (:1)
(Loss < 2dB)	(Loss 3dB)	(Loss > 20dB) (Loss > 40dB)	Passband Typ. Stopband Typ.
DC - 176	191	245 - 285 285 - 1000	1.1 20

Typical Frequency Response






Functional Schematic



Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB) $\bar{x}$	σ	Return Loss (dB)	Frequency (MHz)	Group Delay (nSec)
0.5	0.08	0.01	39.59	2.0	4.36
50.0	0.30	0.01	22.96	5.0	3.96
100.0	0.48	0.01	24.93	10.0	3.99
150.0	0.78	0.01	36.17	20.0	4.01
176.0	1.23	0.02	21.44	30.0	3.95
185.0	1.97	0.06	11.39	40.0	3.98
188.0	2.47	0.09	8.93	60.0	4.08
191.0	3.19	0.12	6.89	70.0	4.26
200.0	6.60	0.19	3.06	80.0	4.33
206.0	9.64	0.21	1.89	90.0	4.47
225.0	19.92	0.19	0.77	100.0	4.65
245.0	29.97	0.18	0.55	110.0	4.82
255.0	34.74	0.17	0.48	130.0	5.35
285.0	49.18	0.26	0.38	140.0	5.79
300.0	57.36	0.55	0.33	150.0	6.29
500.0	76.65	8.71	0.13	160.0	7.08
900.0	77.53	6.17	0.14	176.0	9.25
1000.0	74.82	4.14	0.14	180.0	10.17

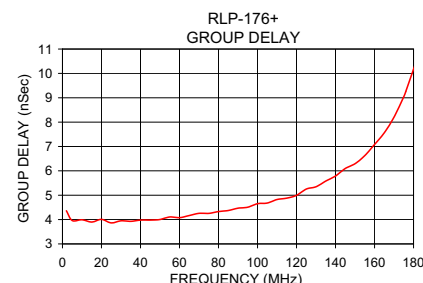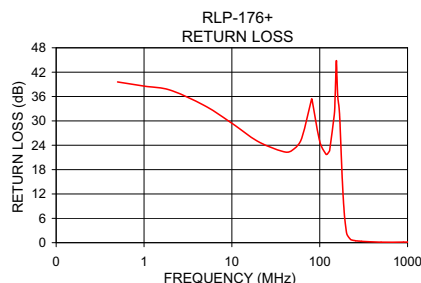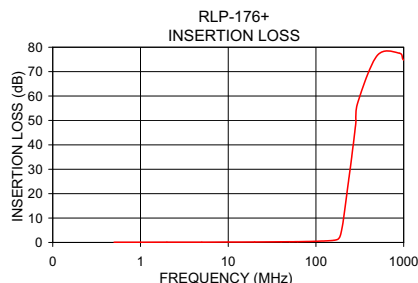

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

ALL NEW
minicircuits.com

REV. OR
M112722
EDR-8678U
RLP-176+
URJ/RAV
071025
Page 1 of 1