

Frequency Mixer

TUF-2HSM+

Level 17 (LO Power +17 dBm) 50 to 1000 MHz



CASE STYLE: NNN150
PRICE: \$13.45 ea. QTY (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA

Pin Connections

LO	4
RF	1
IF	2
GROUND	3
CASE GROUND	3

Features

- low conversion loss, 6.20 dB typ.
- excellent L-R isolation, 47 dB typ.; L-I, 44 dB typ.
- good IP3, 21 dBm typ.
- rugged welded construction

Applications

- VHF/UHF
- cellular
- ISM/GSM

Electrical Specifications

FREQUENCY (MHz)	CONVERSION LOSS (dB)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)			IP3 @ CENTER BAND (dBm)
		L	M	U	L	M	U	
50-1000	6.20	58	40	47	58	35	44	21


1 dB COMP.: +14 dBm typ.

L = 50-100 MHz M = 100-500 MHz U = upper range [$f_c/2$ to f_u]
m = mid band [$2f_l$ to $f_u/2$]


Typical Performance Data

Frequency (MHz)	Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
5.00	35.00	73.03	64.57	1.24	1.51
35.15	65.15	53.95	50.91	1.10	1.53
65.30	95.30	47.75	44.94	1.10	1.52
125.61	95.61	45.94	42.85	1.09	1.44
185.91	155.91	41.73	38.74	1.09	1.43
216.06	186.06	40.07	37.26	1.10	1.39
276.37	246.37	37.49	34.59	1.11	1.38
336.67	306.67	35.70	32.97	1.11	1.40
396.98	366.98	35.50	32.29	1.12	1.37
457.28	427.28	33.92	30.55	1.13	1.36
517.58	487.58	34.70	29.07	1.15	1.37
547.74	517.74	35.38	29.45	1.15	1.39
608.04	578.04	34.75	28.29	1.16	1.38
668.34	638.34	34.53	27.06	1.17	1.38
728.65	698.65	33.69	25.41	1.20	1.36
788.95	758.95	32.39	25.21	1.22	1.45
849.26	819.26	32.23	24.28	1.26	1.49
909.56	879.56	32.46	23.91	1.34	1.52
969.86	939.86	32.66	24.30	1.46	1.54
1000.00	970.00	32.20	24.05	1.62	1.53

Outline Drawing

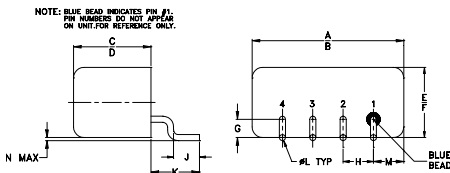

PCB Land Pattern




Suggested Layout, Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.50	.48	.255	.240	.23	.21	.06
12.70	12.19	6.48	6.10	5.84	5.33	1.52
H	J	K	L	M	N	wt
.100	.09	.16	.020	.09	.005	grams
2.54	2.29	4.06	0.51	2.29	0.13	1.9

Demo Board MCL PIN: TB-201 Suggested PCB Layout (PL-081)

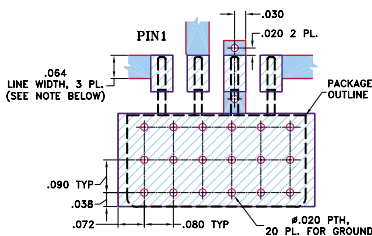

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Electrical Schematic

